


Technical Data Sheet

Recessed Range Hand Dryer

Applicable to products:

92282SS Recessed Hand Dryer

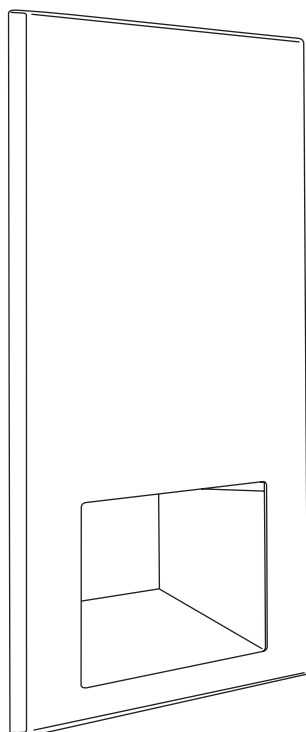

The recessed range provides a sleek and stylish addition to contemporary washrooms. It cleverly uses the wall cavity to achieve a seamless look and support the decor scheme.

Product Image:



Product Description:

- Slim Line Warm Air Dryer designed for 100mm wall cavities.
- 'No touch' automatic operation by infrared sensor built into air outlet.
- CE marked.
- Durable stainless steel recessed enclosure.
- Can be used as a standalone unit or in combination with a paper towel dispenser and waste bin.

Available Finishes:

Brushed stainless steel

Available for specification at:



NBS Source
PARTNER



bimobject[®]

Product Specification:

Material:	Stainless Steel
Dimensions:	W.382mm x H.579mm x D.116mm
Finish:	Brushed
Weight:	14.3kg
Packing/Carton:	1 piece
Warranty:	3 years
Electrical Supply:	220/240 volts 50/60 Hz
Current Consumption:	7.5 amps @ 230 volts

Nominal Output:	1.7 kW
Drying Speed:	Fast dry
Control System:	Automatic, infra red, no-touch
Sensor Range:	100mm vertically under outlet
Air Volume:	130 m ³ /h
Air Velocity:	28 m/s @ 100mm
Air Outlet Temp.:	54°C @ 20°C ambient
Noise Leve:	71 dBA


General Assembly:

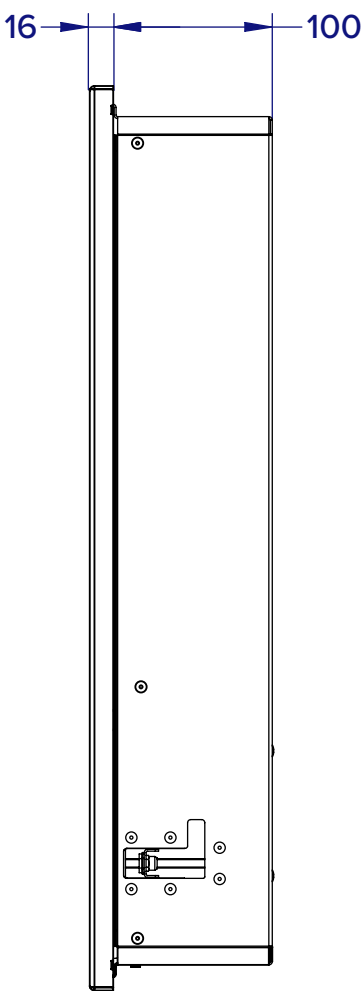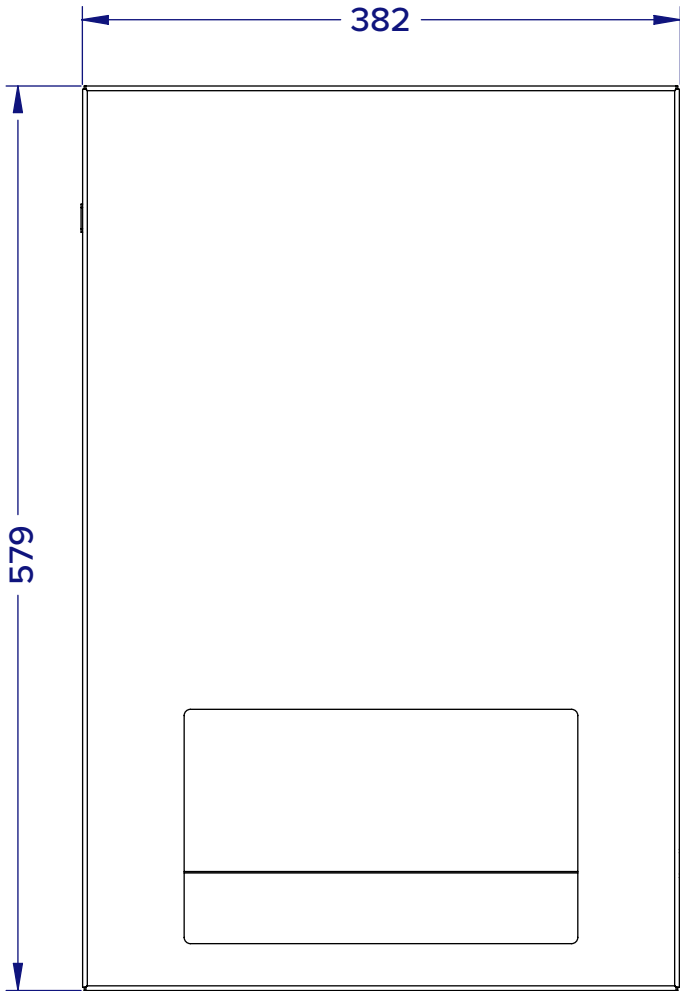

Fixing Holes:

Two methods of fixing:

- Panel Wall - use the 2 clamps built into the unit (shown below).
- Noggin Frame - screw 4 appropriate size screws into the front flange.

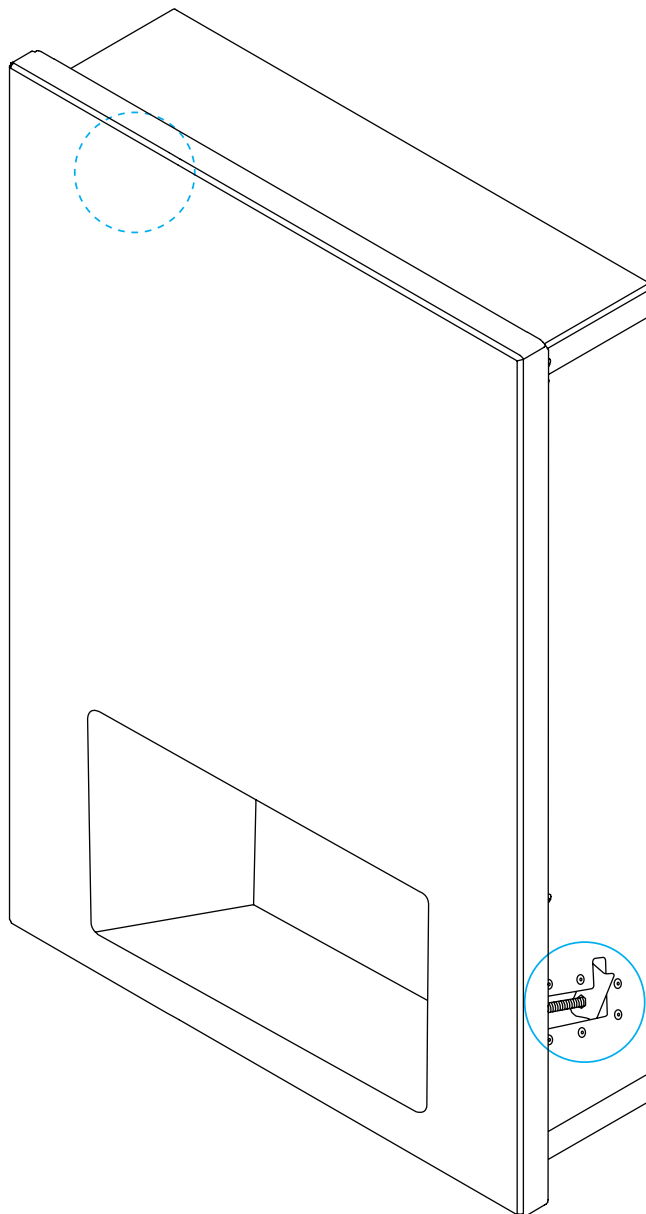

Dudley Industries Ltd
Preston Road, Lytham St Annes, Lancashire. FY8 5AT