

## Installation and User Guide

### Recessed 'Slimline' Range

---

Applicable to products:

92280SS	Recessed Paper Towel Dispenser
92282SS	Recessed Hand Dryer
92284SS	Recessed Waste Bin



## Thank you for choosing the Dudley Industries Recessed Range.

This slimline, recessed range is designed and manufactured by our team at our facilities based in Lancashire, UK. All our products are designed to withstand constant use in busy environments. Our Recessed Range is supported by a 10 year warranty (hand dryer 3 years) provided it is installed and maintained correctly and not subject to any vandalism. Products must not be modified in any way as this will invalidate the warranty.

Please follow these instructions for safe installation and pass this document to the user for safe keeping.



## Safety Information

Please read these instructions thoroughly before installation and retain for future reference.

Remove all packaging and check contents for any damage prior to commencing installation. If there are any issues please contact our Customer Services Team on +44 (0) 1253 738311.

Before commencing installation and drilling into walls check that there are no hidden electrical cables or water pipes.

When using power tools always ensure you wear the correct PPE and operate following the manufacturer's instructions.

## Product Features

The Recessed 'Slimline' Range uses the space available in a wall cavity to recess dispensers, helping to save space and support the washroom decor.

A stylish, discreet and space saving housing for hand drying dispensers and waste bins.

Select the combination of products to suit your space and visitor numbers.

Units are manufactured in brushed stainless steel for a stylish and durable finish.

Choose from paper towel dispenser, hand dryer and waste bin for you perfect combination of products to suit your washroom.

## Unit Dimensions

### Paper Towel Dispenser

Overall: W.382mm x H.579mm x D.116mm

Cut Out: W.357mm x H.548mm x D.100mm

Front Panel Visible Depth: 16mm

### Hand Dryer

Overall: W.382mm x H.579mm x D.116mm

Cut Out: W.357mm x H.548mm x D.100mm


Front Panel Visible Depth: 17mm

### Waste Bin


Overall: W.382mm x H.840mm x D.116mm

Cut Out: W.357mm x H.811mm x D.100mm

Front Panel Visible Depth: 16mm

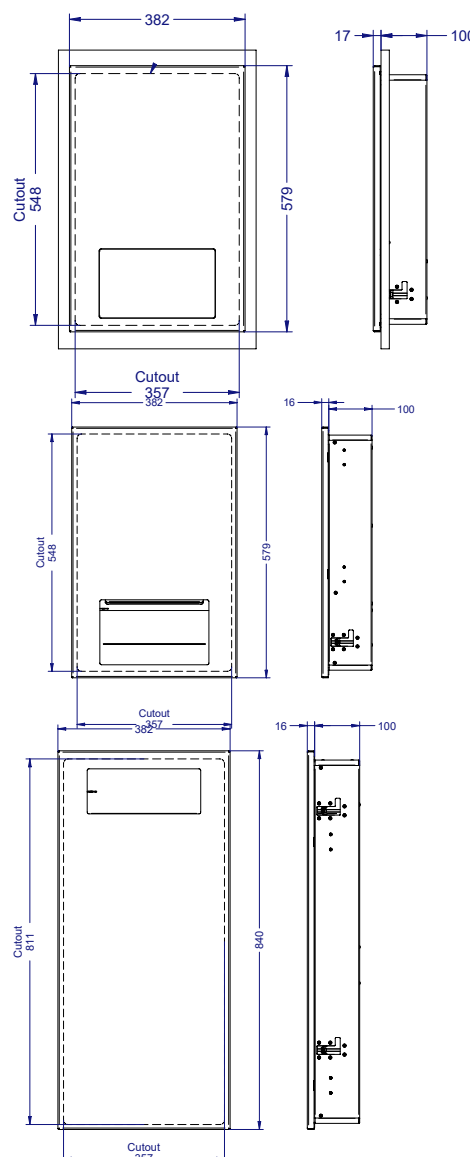

## Cut Out requirements for combined installations:

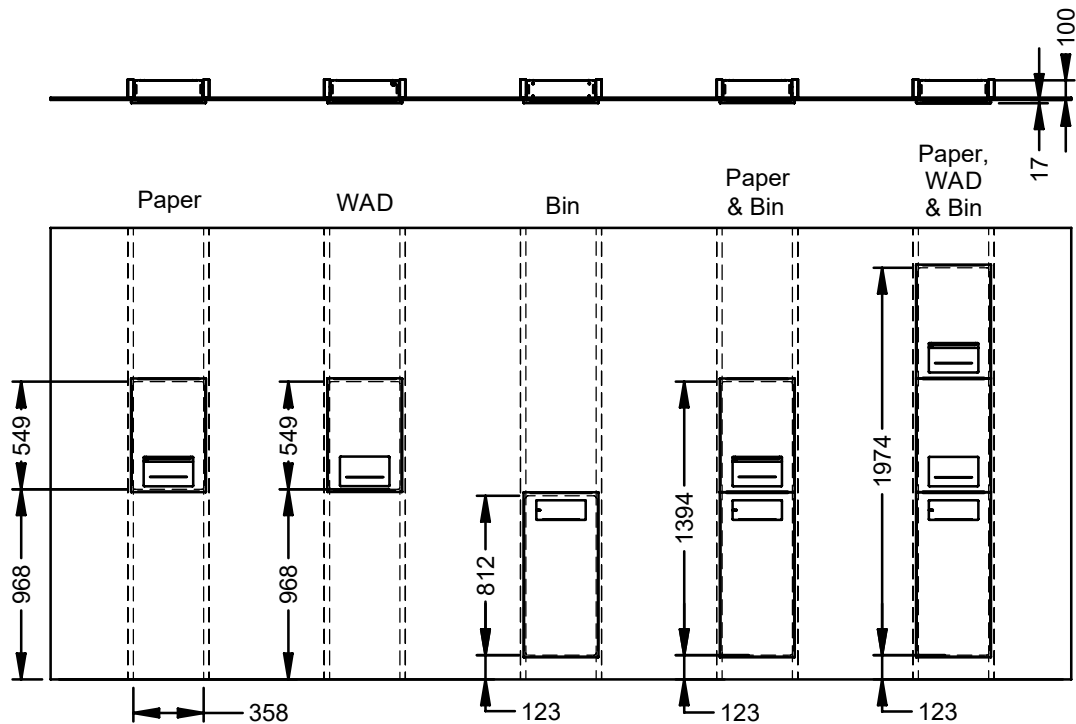

## PRODUCT SPECIFIC INSTALLATION

### Paper Towel Dispenser and Waste Bin

It is the customers responsibility to ensure the correct fixings are used for the intended purpose.

Prior to installation ensure correct size wall opening has been cut.

Position the unit in the opening and fix into place using one of the following methods:

- Panel Wall - use the 2 clamps built into the unit
- Noggin Frame - screw 4 x No. 8 screws into the front flange

### To fill paper towel dispenser:

Remove the paper sleeve from the paper towel pack (if there is one) and simply place the towels into the unit. Release the bottom towel so that it is visible below the unit. If towels are interleaved the next paper towel should always be visible to users.


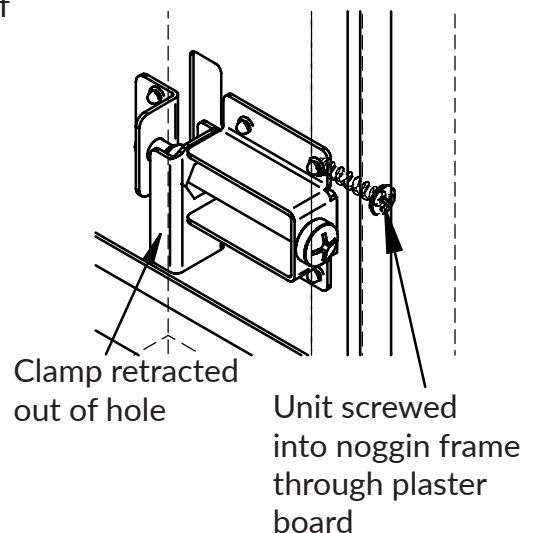


Image of clamp built into the units:

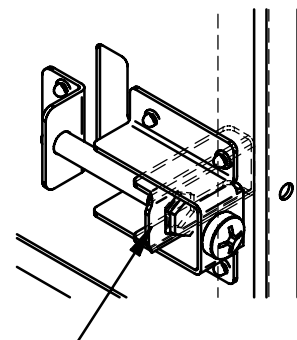

## Hand Dryer

Unscrew the cover from front panel (2 screws at the base of the unit)

Unscrew the cover from the power-pack (2 screws at the bottom of the dryer). Pivot base forward and lift cover off and out of the unit.


For installation where the dryer is being installed individually, remove the spacer from the base of the unit (spacer is only required when modules are stacked together).

Position the unit in the opening and fix into place using one of the following methods:

- Panel Wall - use the 2 clamps built into the unit
- Noggin Frame - screw 4 x No. 8 screws into the front flange

Following the wiring diagrams connect the ground/earth to the terminal marked  $\perp$  the Live supply to terminal marked (L), and the Neutral supply to the terminal marked N.


Wiring Options:

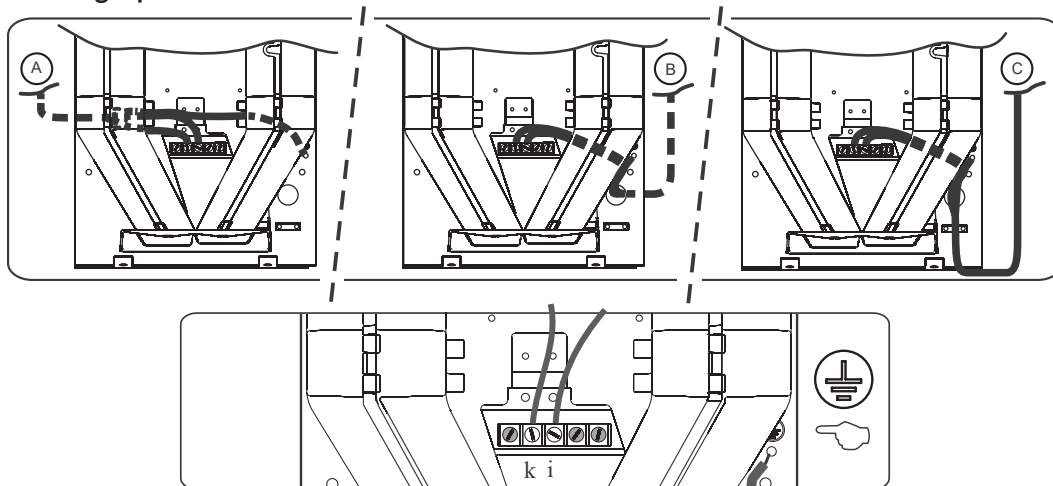

## Hand Dryer Installation Continued:

Connect the cable clamp.

Replace the cover and secure in place by the 3 screws.

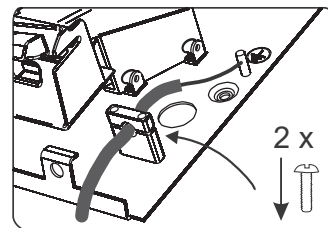

## General Maintenance & Cleaning

### Brushed Stainless Steel Units:

Clean with warm water and a soft cloth, wipe in the same direction as the brushed grain. Dry thoroughly. DO NOT use soap, chemical cleaning detergents or abrasive cleaners.

### Hand Dryer Only:

Every 6 months (or more frequently if in a dusty environment) the inlet and outlet grilles should be cleaned with a small brush to remove accumulated debris.

## End of Life Disposal

All Dudley Industries units are manufactured to ensure longevity and a reliable life span. When a wash station has reached its end of life it should be disposed of in a safe manner. Most components can be re-cycled in accordance with your local authority waste management policy.

**Dudley Industries Ltd**  
Preston Road, Lytham St Annes, Lancashire. FY8 5AT



**Tel:** +44 (0) 1253 738311  
**Email:** sales@dudleyindustries.com  
**Web:** www.dudleyindustries.com